

SDV PFA-Lined Diaphragm Valves

NPS ½" – 8" · Class 150 flanged · handwheel standard · sliding spindle or linear stroke actuator

swissfluid
USA

A lined diaphragm valve for shut-off, flow control and throttling of corrosive and abrasive media, liquid or gas. Cast body in WCB or CF8M with a PFA or PFA-AS lining, a PTFE/EPDM diaphragm, a corrosion-protected spindle with force limiter and yellow position indicator, and a modular bonnet that takes a handwheel, a sliding spindle for external actuators or a pneumatic linear stroke actuator.

Design

Sizes	NPS ½" – 8".
Body	Cast steel WCB (1.0619), RAL 5005 signal-blue epoxy coated, or CF8M (1.4408) stainless steel. Bonnet and handwheel in powder-coated WCB or CF8M.
Lining	PFA standard; PFA-AS (conductive) to order. Minimum lining thickness 3 mm. PVDF, PP and ETFE per the ordering code.
Diaphragm	PTFE/EPDM diaphragm and supporting diaphragm standard; PTFE/FPM to order. EPDM per the ordering code.
Spindle and bolting	Stainless spindle (1.4021) with CF8M compressor; studs and hex nuts in SS304 (A2-70); SS304 name plate.
Connections	Flanges to ASME B16.5 Class 150; EN 1092 to order. Face-to-face to MSS SP-88; ½", ¾", 1¼", 2½", 5" and 8" to EN 558-1 range 1.
Pressure	0.19 psia to 232 psig (½" – 2"), 145 psig (2½"), 116 psig (3"), 102 psig (4" – 6"), 73 psig (8"), derated with temperature. Pressure-temperature chart on the Swissfluid sheet.
Temperature	–22 °F to +302 °F depending on lining. Low-temperature or austenitic steels below +14 °F.
Compliance	Pressure Equipment Directive (PED); testing to EN 12266-1 leakage rate A / API 598; marking to EN 19; certificates to EN 10204 3.1, 2.2 or 2.1.

Source: Swissfluid USA PM 21 us 2019-11.



Main features

- Heavy-duty, robust construction, maintenance-free
- Bubble-tight shut-off across the full pressure and temperature range
- Spindle protected against atmospheric corrosion
- Force-limiting device protects the diaphragm from cold flow and deformation for long cycle life
- Yellow sight indicator shows the actual diaphragm position
- Easy replacement of components on site
- Class 150 flanges for installation into existing piping; DIN flanges to order
- Modular bonnet: handwheel, sliding spindle or linear stroke actuator


Options

- **Sliding spindle (type Ss)** Bonnet with sliding spindle for actuation by external pneumatic or electric actuators; not for Swissfluid type actuators.
- **Linear stroke actuator** Pneumatic linear stroke actuator, fail-close, fail-open or double-acting, with visual position indicator; stroke limiter and manual override to order.
- **Actuator accessories** Electric position indicator, limit switch box, electro-pneumatic or pneumatic positioner with mounting flange kit, filter regulator, 3/2-way or 5/2-way solenoid valve, NAMUR adapter plate, adapter mounting kit.
- **Diaphragms** PTFE/FPM; EPDM
- **Linings** PFA-AS conductive, PVDF, PP, ETFE
- **Flanges** ASME Class 300, PN 16, PN 10, JIS 10K
- **Bolting** B7 body bolts
- **Safety padlock** Padlock on the handwheel
- **Special paint** RAL color to order

SDV PFA-Lined Diaphragm Valves

Dimensions

swissfluid
USA

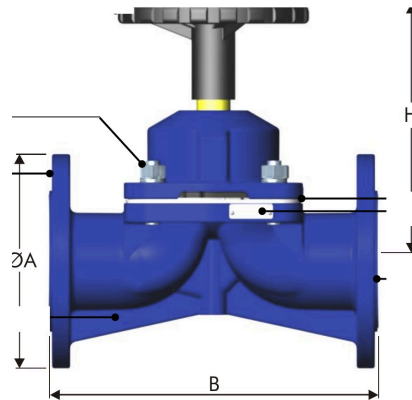

Dimensions, inches · with handwheel

Size	B face-to-face	D	H	Stroke	PS max, psi	Weight lbs	Cv
½"	5.12*	3.35	4.53	0.31	232	5.50	9
¾"	5.91*	3.35	4.61	0.31	232	6.60	12
1"	5.75	3.35	4.88	0.39	232	7.70	17
1¼"	7.09*	3.35	5.28	0.47	232	11.44	26
1½"	6.85	4.72	6.81	0.94	232	13.86	43
2"	7.87	4.72	7.32	1.18	232	19.80	75
2½"	11.42*	7.09	8.19	1.18	145	29.70	110
3"	10.24	7.09	9.17	1.34	116	37.18	155
4"	12.87	9.84	11.10	1.57	102	66.66	232
5"	15.75*	9.84	13.58	2.05	102	94.60	371
6"	16.38	15.75	16.22	2.36	102	130.90	524
8"	23.62*	15.75	19.25	3.54	73	268.40	754

Face-to-face to MSS SP-88; * EN 558-1 range 1 lengths. Flanges to ASME B16.5 Class 150. 8": above 3 bar (43.5 psi) consult the factory.

Source: Swissfluid USA PM 21 us 2019-11.

Note. 8": above 3 bar (43.5 psi) consult the factory. Pressure-temperature derating per size on the Swissfluid chart.

SDV PFA-Lined Diaphragm Valves

Ordering code, Construction and service



Ordering code

Build a code from left to right; a standard valve is **SDV · 4" · 150# · G10 · A85 · M84 · HW**. Some selections require or exclude others; we check every code before it goes to the factory.

Size	½"-8" NPS ½" – 8" (DN 15 – 200)
Flange connection	150# ASME Class 150 · 300# ASME Class 300 · PN16 PN 16 · PN10 PN 10 · JIS 10K JIS 10K
Body	G10 WCB carbon steel · G15 CF8M stainless
Lining	A85 PFA · A86 PFA-AS conductive · A88 PVDF · A89 PP · A91 ETFE
Diaphragm / supporting diaphragm	M83 PTFE/FPM · M84 PTFE/EPDM · M60 EPDM
Actuator	HW handwheel · FC pneumatic, fail-close · FO pneumatic, fail-open · DA pneumatic, double-acting · Ss sliding stem
Options	RAL special paint · B7 B7 body bolts

Data and codes: Swissfluid USA PM 21 us 2019-11.

Construction. PFA-lined body in WCB or CF8M, PTFE/EPDM diaphragm with supporting diaphragm, bonnet and handwheel in powder-coated WCB or CF8M, stainless spindle with CF8M bayonet compressor, A2-70 stainless studs and nuts, SS304 name plate.

Typical service. Shut-off, flow control and throttling of corrosive and abrasive process media, liquid or gaseous.

SDV PFA-Lined Diaphragm Valves

Ordering from LinedPipe.Com

swissfluid
USA

Size, series, lining, class and quantity are enough to start. For a quotation send the service conditions (media, concentration, temperature, pressure, flow), the end connections and the actuation you need; we will confirm the ordering code, the installation dimensions and a delivery time.

Request a quote

(251) 625-4949 · info@linedpipe.com · linedpipe.com/contact/
(the online quote form takes valves line by line and attachments).

What to tell us

- Series and size, full or reduced port, Class 150 or 300
- Lining and ball or disc material, seat and elastomer where they apply
- Body material: WCB carbon steel or CF8M stainless
- Topworks: bare stem, lever, gearbox, pneumatic or electric actuator, fail position, accessories
- Options: conductive lining, grounding strap, chlorine clean, customer tag, special bolting
- Certificates: EN 10204 3.1 material certificates and test reports on request

Dimensions

Face-to-face lengths in this catalog are stated against ASME B16.10 or EN 558-1 as noted; sizes marked * are not ASME B16.10 lengths (the note under each table says what they are). Confirm the installation length on the order acknowledgement before cutting pipe.

LinedPipe.Com

A DIVISION OF MARSPEC 

IN PARTNERSHIP WITH

swissfluid
USA

LinedPipe.Com

Marspec Technical Products, Inc.
24042 US Highway 98, Fairhope, AL 36532
(251) 625-4949
info@linedpipe.com · linedpipe.com

Swissfluid USA, Inc.

10303 Greenland Court
Stafford, TX 77477
swissfluid.com

Version 1.11 · Released 10-30-2026. Product data from Swissfluid literature as cited under each table; subject to change without notice. **Confirm critical dimensions with the order acknowledgement.**